

# CHLORIDE

by Signify



## Exit/Emergency


46 Series

Slender die cast aluminum  
LED exit sign



Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Cat.No: \_\_\_\_\_  
Type: \_\_\_\_\_  
Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
Notes: \_\_\_\_\_

### Example: ER46L2R

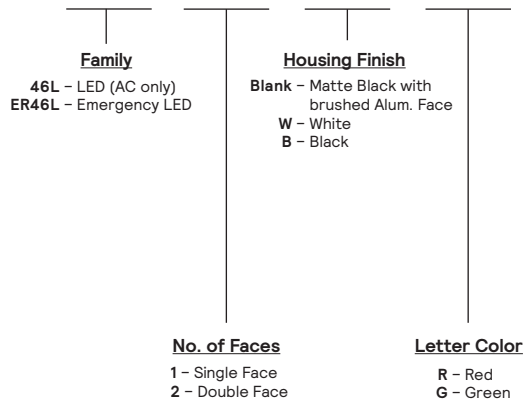

### Accessories

PVS2 – Polycarbonate Vandal Shield  
WG4 – Wire Guard

### codes and standards

- UL listed to standard 924
- NFPA 101(Life Safety Code)
- NFPA 70 (National Electric Code)
- UL listed for damp locations

### construction and finish

- Housing is a low profile design , constructed of die cast aluminum .
- Available in matte black housing with brushed aluminum face , black , or white finish .
- All signs provided with shallow canopy for ceiling or end mount installations .
- All units have concealed directional chevron indicators (knockouts) .
- 6" letter height with 3/4" stroke .
- Available in single face or double face configurations .
- Quick snap together design .

### installation

- Universal mounting ( wall , end , or ceiling ) .
- Canopy and mounting hardware provided for ceiling and end mount applications .
- Universal knockouts on backplate allow for wall mounting directly to J-Box .

### electronics

- The red or green efficient LEDs provide a bright uniform illumination and have an expected life of 10 years .
- LED indicator light and push button switch .
- 120/277VAC Dual voltage input .
- Power Consumption : 2 . 5 Watts

### battery

- Maintenance free 6V sealed nickel cadmium battery .
- Operating temperature range of 0°C to 50°C (32°F to 122°F) .
- Provides 90 minute of emergency illumination while in emergency mode .
- 24 hour recharge after 90 minute discharge .
- Low voltage battery disconnect prevents deep discharge damage to battery .

### warranty

- Five year warranty on exit .



# 46L Slender die cast aluminum LED exit sign

## dimensions

