



CATALOG NUMBER	TYPE
PROJECT NAME	DATE

SPECIFICATIONS

FEATURES

- Architectural-grade die-cast aluminum emergency light
- Suitable for both indoor and outdoor applications
- Part of Astralite's quick ship program

CONSTRUCTION

- Die cast aluminum construction with powder-coated finish

LAMP

- Two 1W LED lamps provide superior color rendering capabilities; higher wattage lamps are available upon request, consult factory for more options

ELECTRONICS

- Dual-voltage input capability: 120/277V
- Low-voltage disconnect
- AC lockout installation
- Brownout protection
- Self-diagnostic is standard

BATTERY

- Nickel-cadmium battery is standard and provides a minimum of 90 minutes of illumination in emergency mode
- Operating temperature range: 0 °C to 40 °C

COMPLIANCE

- Meets or exceeds UL 924, NFPA 101, NEC and OSHA illumination standards

WARRANTY


- 5-year warranty on housing and electronics. Battery is prorated

DC-AP-LED

ARCHITECTURAL-GRADE EMERGENCY LIGHT



DIMENSIONS

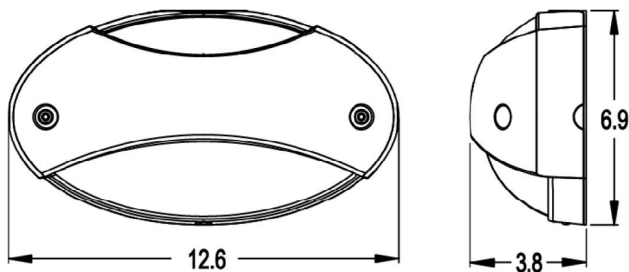

Material	Mounting	Battery	Code Compliance	Dimensions
Die-cast Aluminum	Ceiling / Wall	Nickel-cadmium	UL 924	12.6" W X 3.8" D X 6.9" H

ORDERING GUIDE

MODEL	HOUSING FINISH	OPTIONS
DC-AP-LED Indoor/Outdoor LED Emergency Light	BK Black WH White DB Dark Bronze SL Silver	C Cold Weather (-18°C - 50°C)