

## Prestige™ Edge-Lit Series

Premium die-cast aluminum exit sign



### Construction

- Housing, trim plate, trim ring and canopy made of die-cast aluminum
- U-shaped clear acrylic Legend panel features laser-etched letters and chevrons
- 6 inch EXIT lettering legend, available in red or green
- 8 inch EXIT lettering legend, available in red
- Choice of finishes: white, black or brushed aluminum, polished brass, polished chrome or bronze

### Mounting

- Modular design allows for surface or recessed mount
- Canopy included for surface wall, end or ceiling mount applications
- Trim ring included for recessed wall or ceiling mount applications.
- Housing provided with conduit knock-out 1/2", top, back and end
- (C) circular or (A) angular trim plate used for surface or recessed wall or ceiling mount applications
- Hanger bars included for lay-in installation in T-bar grid

### Special wording panels

- Available. Contact your sales representative with your design requirements

### Electronics

- Optional Advanced Diagnostics
- Optional Nexus® monitoring system
- 120-277 50/60Hz


### Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- E-California Energy Commission Title 20


### Warranty

- Unit has a five-year limited warranty  
Detailed warranty terms located on page 202 or online at:  
[www.emergi-lite.com/usa/files/EL\\_Warranty.pdf](http://www.emergi-lite.com/usa/files/EL_Warranty.pdf)

### Mounting configurations

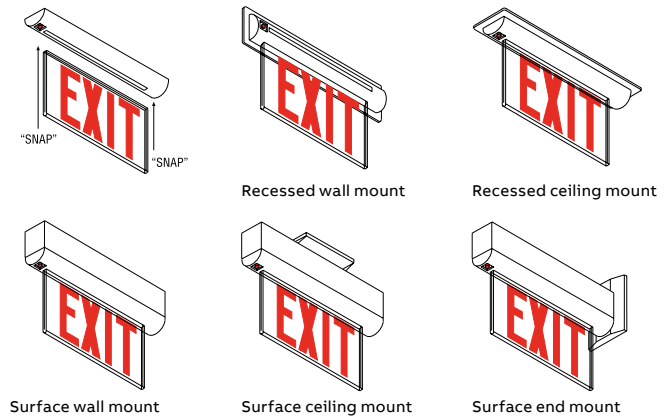


### Trim plates




Circular trim plate

Angular trim plate

### Recessed models

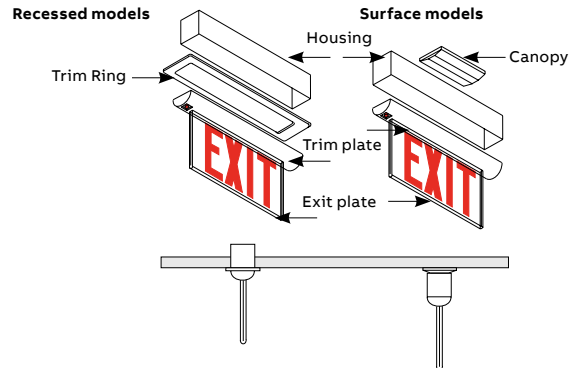


### Arrow (chevron) designation




Wording and chevrons not to scale. For illustration purposes only.

### Housing color

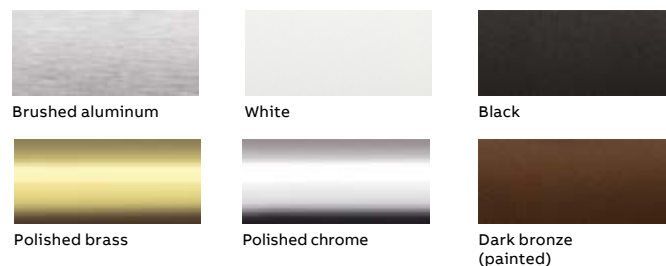

**Dimensions**

Dimensions are approximate and subject to change.

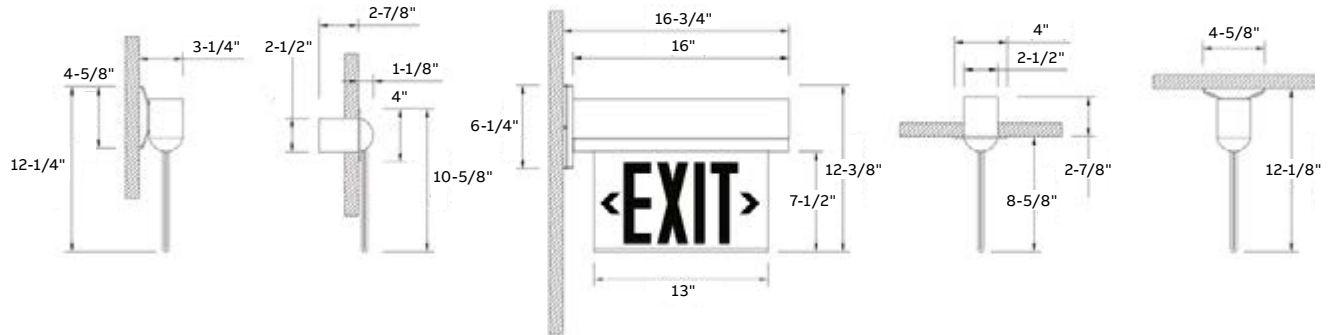

**Power consumption**

Model		AC specs		DC specs
AC-only	120 to 277VAC, 50/60Hz	Less than 1.4W	-	-
AC/DC-remote	120 to 277VAC, 50/60Hz	Less than 1.4W	6 to 24VDC	Less than 1.4W
Self-powered	120 to 277VAC, 50/60Hz	Less than 2.3W	Ni-Cd battery	Min. 90 minutes
Self-powered diagnostic	120/277VAC, 50/60Hz	Less than 2.3W	Ni-Cd battery	Min. 90 minutes

**Accessories** (order as a separate item)

Description	Suffix <sup>1</sup>
White pendant	P*-WT
Black pendant	P*-BK
Gray pendant	P*-GY

<sup>1</sup>Custom pendant lengths and colors available, specify (12", 24", 36", etc.)

**How to order**

Housing color	Series	Faces	Designation	Legend color	Background color	Arrows
Blank= Brushed aluminum W= White B= Black PB= Polished brass CH= Polished chrome BR= Bronze	LX= AC-only LXN= Self-powered	1= Single face 2= Double face	N= New design	R= Red G= Green	C= Clear (single face only) W= White M= Mirror	Blank= No arrow D= Double arrow L= Arrow left R= Arrow right RL= Right & left (double face) UA= Universal field installed arrows
	<b>Trim</b>	<b>Mounting</b>	<b>Options</b>			<b>Legend size</b>
	-C= Circular -A= Angular	Blank= Universal mount	Blank= No option -NEX= Nexus® wired <sup>1</sup> (consult your sales representative) -NEXRF= Nexus® wireless <sup>1</sup> (consult your sales representative) -D= Self-test and diagnostic <sup>1</sup> -DC= AC/DC remote 6-24 VDC -FA= Fire alarm <sup>1</sup> -FZ= Flasher & buzzer <sup>1</sup> -2CKT= Two circuit, AC only			Blank= 6" EXIT legend -8= 8" EXIT legend (red only) -LP= Panel shipped separately -X= Back box shipped separately

**Example: WLXN2NRWRL-A-D**

<sup>1</sup>Self-powered only