

DATE:	COMMENTS:
PROJECT:	

FEATURES

- UL Listed for Wet Location
- Ultra-bright, energy efficient, long-life Red or Green LED
- High performance, premium grade, ultra-bright white LED emergency lamps
- Each emergency head totals 1.17W
- Remote capacity standard
- Will operate 2 single head remotes or 1 double head remote. Max load: 3W
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 3.6V long-life, maintenance-free, rechargeable Ni-Cad battery
- Self Diagnostics feature is standard
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours
- 120/277 VAC field-selectable inputs



ORDERING INFORMATION *RWL-C-EM-G-U-WH-MEB*

1. SERIES	2. OPERATION	3. ILLUMINATION	4. FACE COUNT	5. FRAME COLOR	6. MOUNTING
RWL-C	EM		U		MEB
	EM Ni-Cad Battery Backup	G Green R Red	U Universal	WH White	MEB End / Back Mount

7. OPTIONS

BLANK = NO OPTION

- SD Self-Diagnostics
- EB Remote Capacity

ORDERING NOTES

- 1. EB and SD must be specified together

ACCESSORIES; ORDER SEPARATELY

- WG 5 = Wire guard 15.75" X 14.75" X 6.75"
- WG 10 = Wire guard 13.5" X 12.0" X 16.5"

SPECIFICATIONS


CONSTRUCTION

- UV resistant polycarbonate faceplate
- Integrated gasket to ensure protection
- High impact corrosion resistant thermoplastic

ARROWS

- Field selectable knockout chevron directional indicators

DIMENSIONS

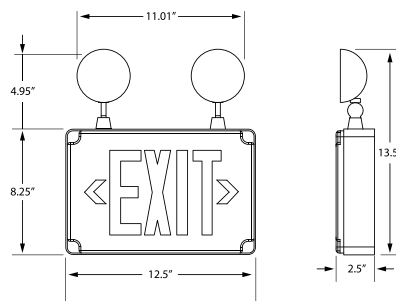

TEMPERATURE RATING

- From 32°F to 122°F

APPROVALS

- • UL 924
- • UL 924 Wet Location
- • NFPA Life Safety Code 101
- • NFPA 70-NEC
- • OSHA

WARRANTY

- Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted